
CONFIGURATION GUIDES › APPLICATION SERVERS

SingleAgent Installation for Appserver using command Mode for Linux

Applicare 10.0 · Updated September 13, 2024 · java, singleagent, linux · **Pending technical review**

1. Log in to **Applicare console,** Navigate to **Download Agents** screen.

2. On the machine where the agent will be deployed. If **Wget** is installed, execute the **Wget Installer** command. If **Curl** is installed, Use the **Curl Installer** command instead.

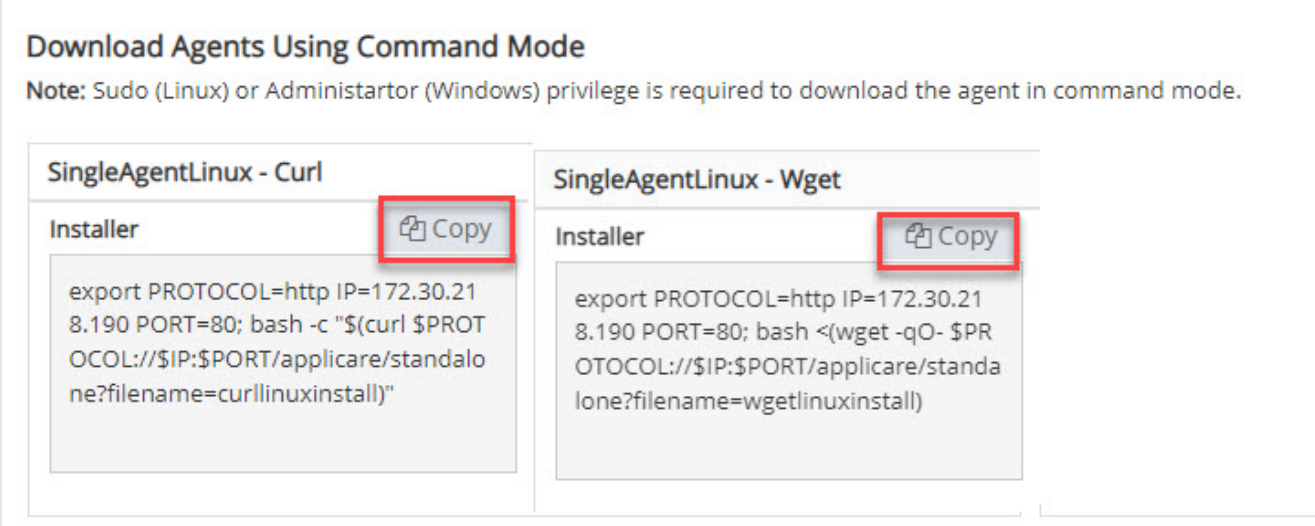

3. Enter **n** to prevent the SingleAgent from starting Automatically.

Monitoring with Applicare