CONFIGURATION GUIDES › INSTALL, START & UPDATE

Starting SingleAgent on Linux


Applicare 10.0 · Updated February 5, 2025 · singleagent, linux · **Pending technical review**

We can start the SingleAgent in two ways

Background mode


1. To enable **background mode**, Navigate to the directory where **ApplicareSingleAgent/agentscripts** and run following command.

```text
nohup ./startAgent.sh &
```




Service Mode


1. Administrative permission required to **install or uninstall singleagent.service**
2. Navigate to the directory where **ApplicareSingleAgent/agentscripts**.
3. Execute **./installAgentService.sh** to install **singleagent.service.** and start **singleagent.service.**




1. To check the status of service, use the command **systemctl status singleagent:**

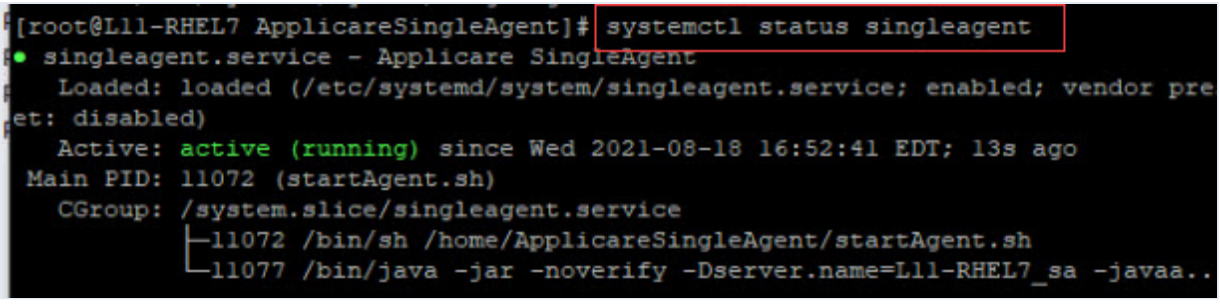


2. To **stop** the service, run the command **systemctl stop singleagent:**



3. To **Start** the service, execute the command **systemctl start singleagent:**



4. To **Uninstall** the service, execute **./uninstallAgentService.sh:**

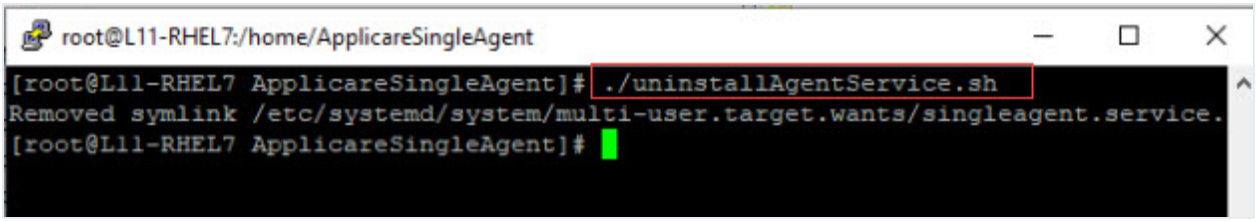

Monitoring with Applicare