CONFIGURATION GUIDES › APPLICATION SERVERS

Installing Applicare SingleAgent on WebLogic running on Linux


Applicare 9.2 · Updated March 23, 2026 · java, singleagent, linux · **Pending technical review**

1. Install Applicare SingleAgent in the machine where **Weblogic** is running.
2. Navigate to the <**weblogic_domain_path**>\bin directory and add the following line to the **startWebLogic.bat** file:

```text
. /<ApplicareSingleAgent_homepath>/scripts/setAgentEnv.sh
```

- **<ApplicareSingleagent_homepath>**

  - The directory where the Applicare SingleAgent zip file has been extracted.

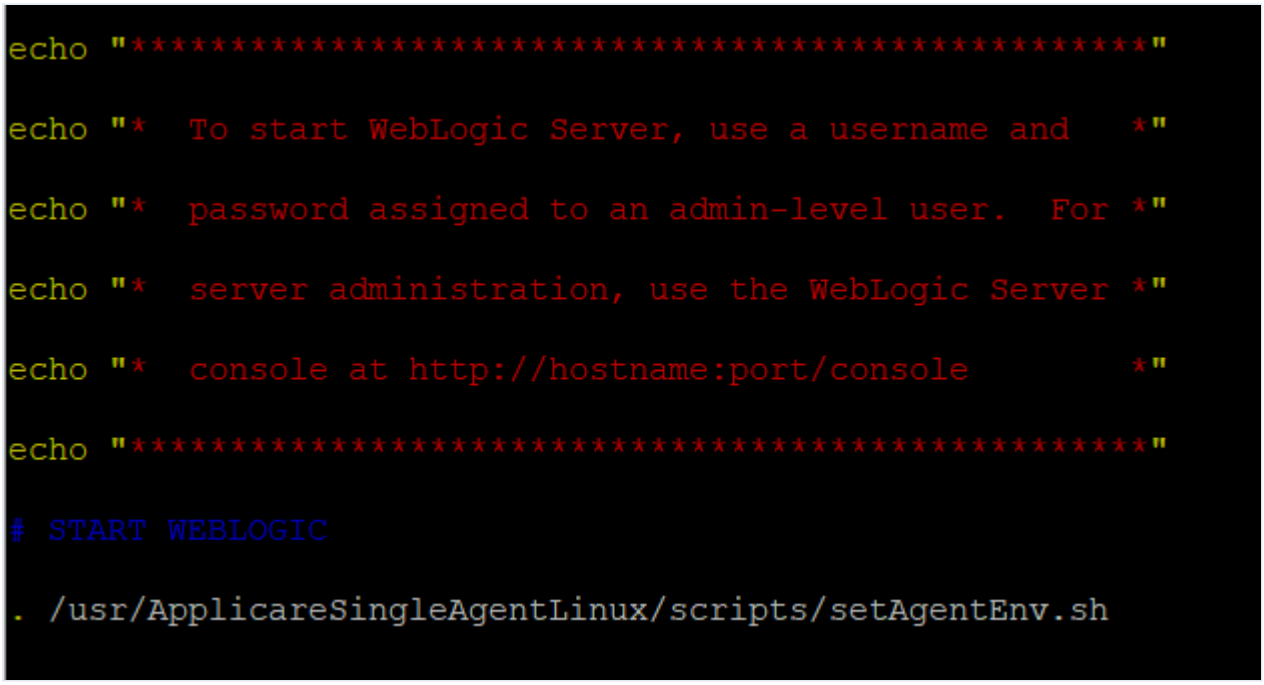

3. Restart Weblogic

For Other Docs - Click here