
CONFIGURATION GUIDES › INSTALL, START & UPDATE

Deploying the agent on Linux and Windows via the Remote Deployment feature

Applicare 9.2 · Updated September 13, 2024 · singleagent · **Pending technical review**

Step 1: Log in to Applicare controller and navigate to the **Remote Deployment** screen on left side menu.

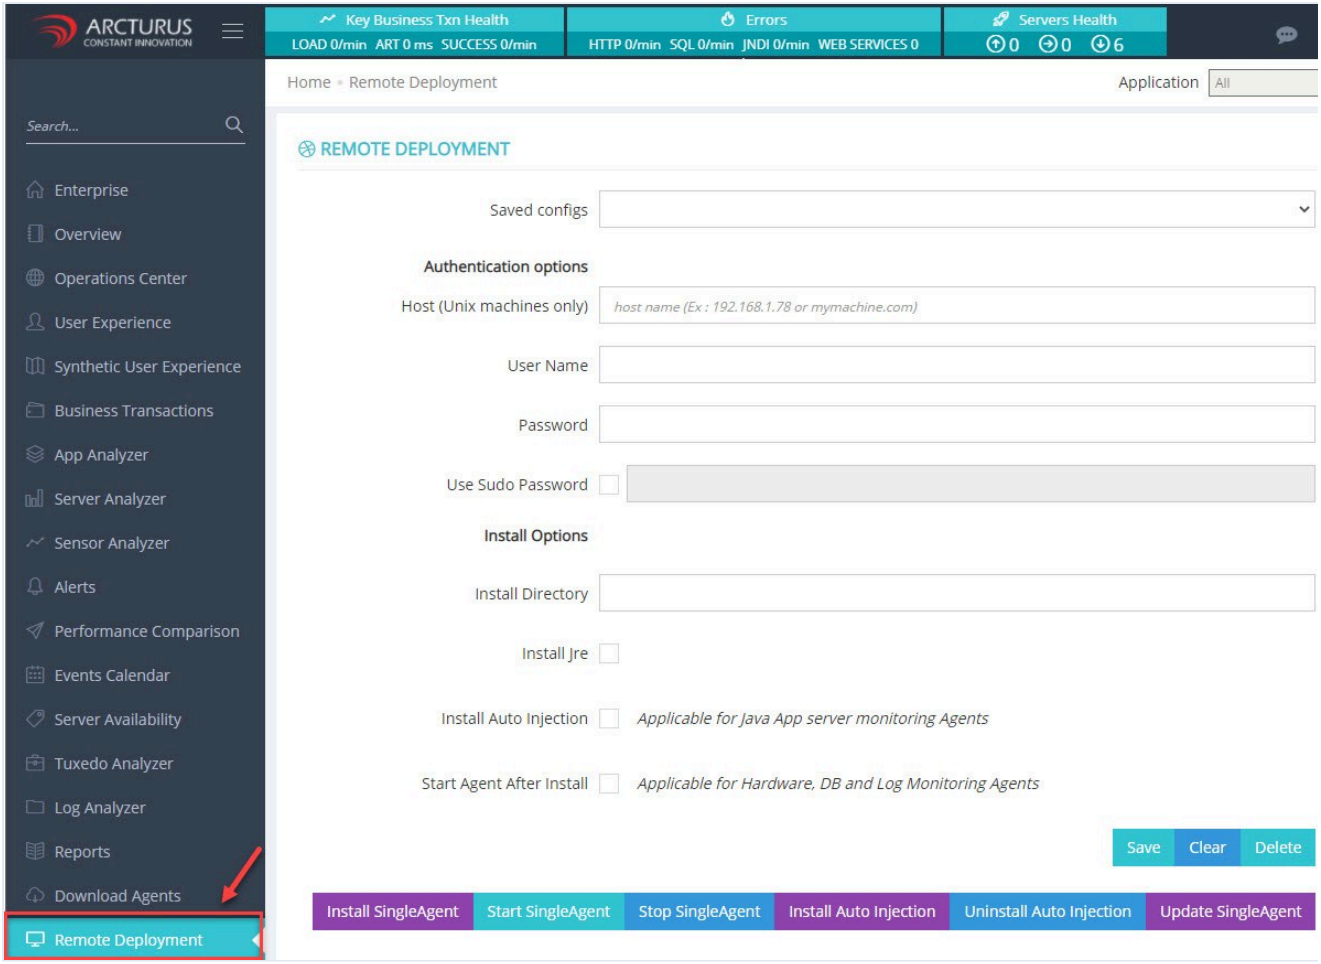

Step 2: Enter the configuration details of the machine where the agent will be deployed.

Host (Unix machines only) - Enter the hostname or IP address of the machine.

User Name - Enter the login user name.


Password - Enter the login user password.

Use Sudo Password - Enable this option if the login user does not have root permission.


Install directory - Specify the location where the agent will be deployed.

Start Agent After Install - Enable this option to start the agent immediately after installation, particularly if you plan to monitor hardware, database and logs.

Step 3: After entering all the configuration details click the **save** button.

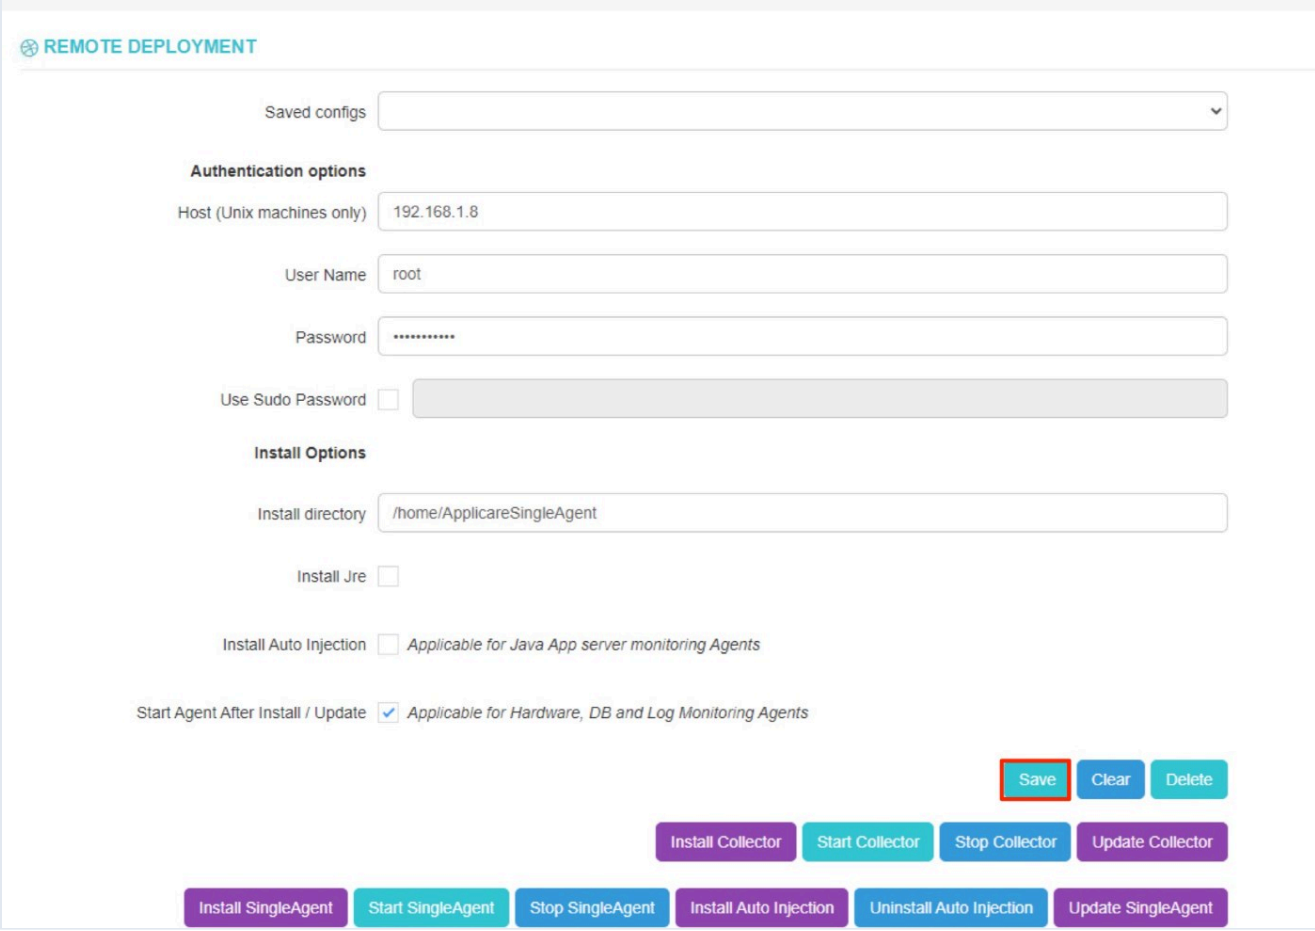

Step 4: Save the configuration, select the machine from the **saved config** dropdown. Then click on **Install SingleAgent** button.

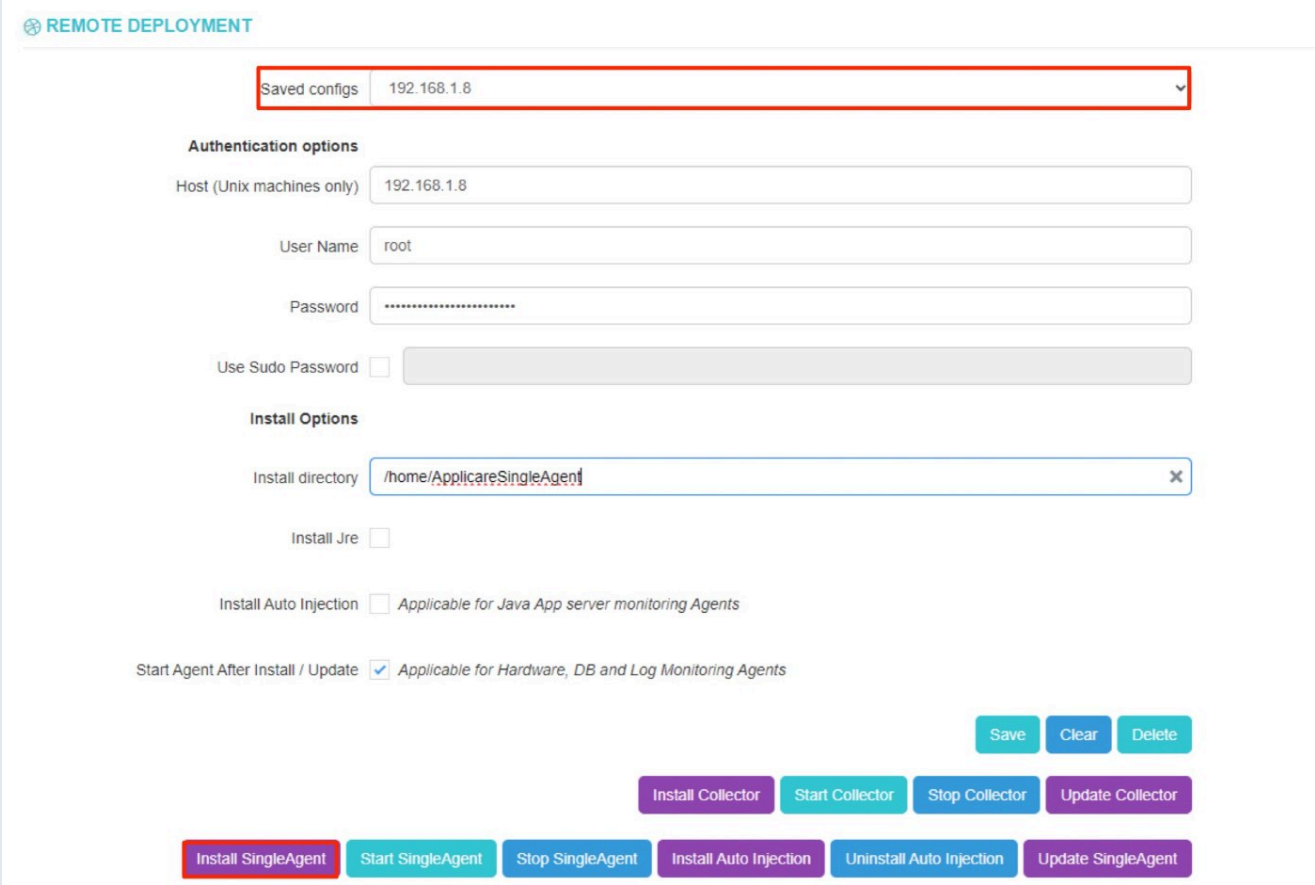

Follow these steps only if you need to update the agent.

Step 1: Go to the Remote Deployment screen from the left-side menu. **Step 2:** Select the machine where the agent is running from the **saved config** dropdown, and then click the **Update SingleAgent** button.

Monitoring with Applicare